

O'Pro +

Wide range with O'Pro protection technology
for +50% tank life time



COMFORT

- Control knob on the bottom of the tank
- New Atlantic design
- Flat chromed thermometer

SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

QUALITY - DURABILITY

- O'Pro technology - Exclusive passive electronic anti-corrosion system to permanently combat rust
- Magnesium anode for increased protection of the tank
- New generation diamond-quality enamelling
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid rust around flange

USER-FRIENDLINESS

- IP 24 - Full compliance with European standards for electrical safety and user protection
- Plug**
- Pilot light



Vertical
wall mounted

Horizontal
wall mounted

EASY TO INSTALL



Model available*

ELECTRIC WATER HEATER
30 TO 120 L
(VERTICAL WALL MOUNTED)
50 TO 100 L
(HORIZONTAL WALL MOUNTED)

Capacity




More hot water



BOTTOM CONTROL KNOB
Controls



Tank protection




COPPER HEATING ELEMENT

Heating element type

* Model types : A : Vertical wallmounted / B : Horizontal wall mounted / C : Vertical Floor standing


**Depending on the model

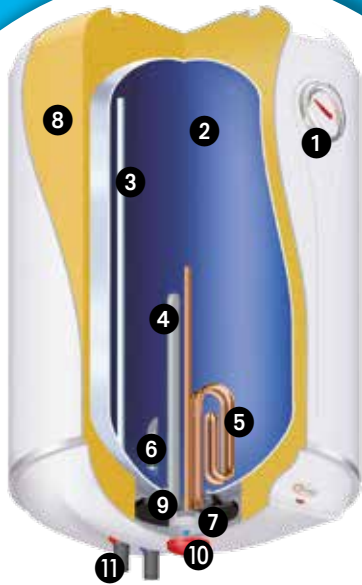


- 1 External thermometer
- 2 Diamond-quality enamel
- 3 Optimised stainless outlet pipe
- 4 Magnesium anode
- 5 Sheathed immersion heating element
- 6 Inlet diffuser
- 7 Thermostat
- 8 High-density polyurethane foam 0% CFC
- 9 O'pro System
- 10 Bottom control knob
- 11 Dielectric union

INSTALLATION DIMENSIONS (in mm)

Vertical wall mounted

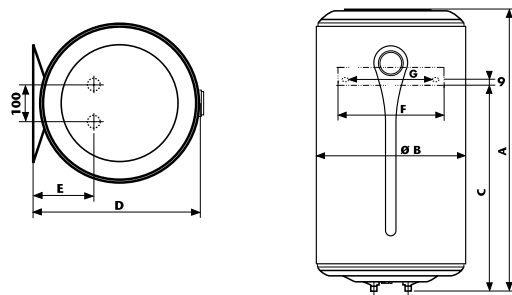

Horizontal wall mounted

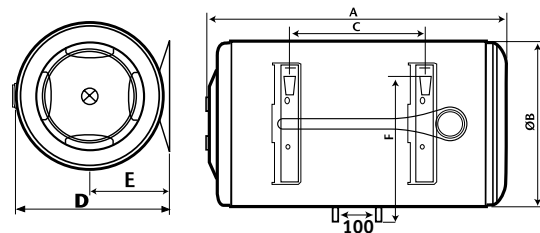

O'PRO + Vertical wall mounted

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (KWH/24H AT 65°C)	HEAT-UP TIME AT 60°C (Δt=50°C)
30	1 200	230 (220/240)	0.8	1h12
50	2 000	230 (220/240)	0.95	1h18
80	2 000	230 (220/240)	1.40	2h20
100	2 000	230 (220/240)	1.85	2h48
120	2 000	230 (220/240)	2.15	3h33

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (kg)
	A	B	C	D	E	F	G		
30	431	433	235	451	165	100 to 280	240	72	14
50	585	433	380	451	165	100 to 280	240	72	16
80	814	433	590	451	165	100 to 280	240	72	20
100	973	433	740	451	165	100 to 280	240	72	22
120	1 127	433	915	451	165	100 to 280	240	72	29

O'PRO + Horizontal wall mounted

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (KWH/24H AT 65°C)	HEAT-UP TIME AT 60°C (Δt=50°C)
50	1 500	230 (220/240)	1.15	1h38
80	1 500	230 (220/240)	1.55	2h38
100	1 500	230 (220/240)	1.95	3h36

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)						FLANGE OPENING (Ø) mm	NET WEIGHT (kg)
	A	B	C	D	E	F		
50	580	433	167	451	234	343	72	16
80	809	433	349	451	234	343	72	20
100	968	433	497	451	234	343	72	22